OROTIG 🗮



MARKER - CANOVA

The Orotig technology in a compact, easy-to-use laser marker

Compact laser marking machine with an **essential design**, Canova combines **high performance**, **precision**, and **ease of use** thanks to the proprietary MARKo software.

This **fast**, **safe and precise** laser is ready to become the pivotal way for your business to offer customers an immersive experience for personalising their jewellery in real time, and can be smoothly integrated in the workflow of your company.



Compact

The reduced size and **patented helmet-style opening of the hatch** make Canova a compact laser ideal for even the smallest spaces.

★ PATENTED SYSTEM



Safe

This is a Class 1 laser device. It has a special CE-certified inspection window, which allows safe marking without goggles with the door closed, and sensors that inhibit operation when the hatch is open, guaranteeing total safety for operators and customers.



Easy to use

Expert operators? No need! Thanks to the **new proprietary software**, even the least experienced operator can perform marking in just a few clicks.



Low energy consumption

With a maximum power consumption of only 300 W, Canova marker is one of the most eco-friendly on the market.



MARKo: fast and intuitive integrated software

FOR MARKING IN A FEW MINUTES

Thanks to the **new proprietary MARKo software**, even inexperienced operators can **perform marking in** just a few clicks and with no margin for error.

The **guided procedure intuitively assists the operator throughout the entire process**, allowing them to import an existing file or create text from scratch.

To enable even novices to carry out professional marking, the operator can set the marking parameters himself or choose from one of our preset programs, specially designed by our technicians to achieve the best results for the type of metal and work in hand.







Guided paths to guide the operator through the various steps and reduce the margin for error.



Animated tooltips to explain the functionalities of the software even to those using the marker for the first time.



Focusing system

PRECISION AND QUALITY MARKING

Canova provides a **range of focusing options** to assist operators during the marking process, streamlining operations and ensuring optimal results.

Digital autofocus included as standard

Orotig has **developed an innovative autofocus system that enables precise focusing on pieces in the peripheral areas of the work surface**, simplifying the marking of large items like knives or frames.

The depth camera, equipped with sensors used in autonomous driving systems, scans the field and measures the distance of objects on the work surface. This data moves the head along the Z-axis, assisting the operator with focusing.

Additionally, the digital autofocus can be used in semi-automatic mode, allowing the operator to select the focus point with a click using the depth camera.

Mechanical autofocus

A touch probe **automatically adjusts the Z-axis based on the height detected on the workpiece**, ensuring exceptional focusing precision, even on complex or reflective surfaces. Available upon request, this system can be added or used as an alternative to the digital autofocus.



Manual focusing system

The manual focusing system features **two calibrated red laser pointers** mounted on the marking head, angled to **intersect precisely at the focal point**. When the workpiece is out of focus, the laser dots will appear separate. The operator manually adjusts the height of the marking head until the dots overlap, indicating optimal focus.





When dealing with pieces having irregular surfaces or requiring particularly deep markings, **the motorized Z-axis allows for the automatic adjustment of the axis movement during marking**.

The software **dynamically adapts** the focus based on the predefined increment.



The new focusing system makes it possible to focus even in the peripheral areas of the working surface.



Thanks to the depth camera, Canova scans the field of view by measuring the distance of objects placed on the working surface.

Two built-in cameras

WITH ZOOM UP TO 0.5 MM

Two cameras allow perfect visibility of the workpiece: one angled camera offers a **panoramic view of the part**, while the second has powerful magnification for viewing the smallest details. The operator can **zoom right into the marking area** and position himself on the workpiece with centesimal precision, and this is particularly useful to perform very small markings.

To achieve even higher standards of accuracy, Canova also offers the option of replacing the standard 12 mm lens with longer lenses (16 mm and 25 mm), which allow even greater magnification, **displaying details down to 0.5 mm in high resolution**.

Live preview

FOR MORE PRECISE POSITIONING ON THE WORKPIECE

Do you want to be sure of the result before marking precious jewellery? The Canova integrated camera allows you to **preview the desired image or text directly on the workpiece**. The operator displays the marking area on the screen and overlays the design to be marked, creating a real-time preview.




Auto-centered design

FOR MORE PRECISE POSITIONING ON RINGS AND BRACELETS

When marking on the inside or outside of rings and bracelets, it is often difficult to perfectly center the texts being marked, with the risk of inaccurate markings on valuable jewellery.


Canova offers a functionality specially developed for our chucks that allows the text to be **automatically centered on the ring to be marked:** you simply need to set parameters such as ring diameter and thickness and the software not only automatically finds the correct focal distance, but also moves the text to be marked by the necessary increment to perfectly center it on the workpiece.

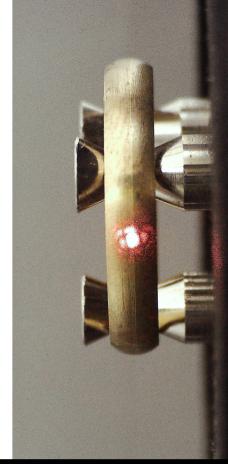



Canova offers the possibility of installing focal lenses of different lengths, each able to guarantee the best marking results on various types of workpiece. In addition to the standard **160 mm** lens, one can use a **100 mm** lens, which is perfect for extreme precision and **ultra-high definition of the details**, or a **210 mm** lens, which is suitable for **larger objects** with a marking area of up to 145 × 145 mm.

With a Z axis stroke of more than 260 mm and a large work surface, it is possible to mark **rigid bracelets and necklaces up to a diameter of 118 mm** even with the longer 210 mm lens.

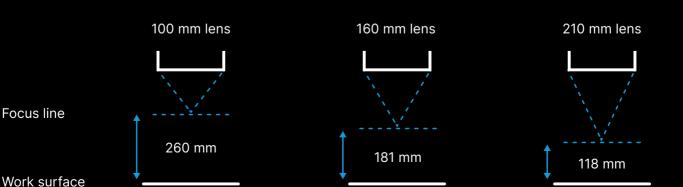

Easy dust recovery

FOR CLEANING THE EXTRACTION SYSTEM IN MOMENTS

The extraction system of the Canova has been designed to optimise dust recovery during the marking of precious metals.

The two flexible hoses allow the suction nozzles to be positioned as close to the workpiece as possible. **The central hose is straight and simple in design and can be cleaned with a rag without detaching it from the machine**, or it can also be easily removed from the back without having to disassemble the marker.





Easy cleaning facilitated by the design of the central tube that **allows it to be easily removed from the back without the need to disassemble the marker**.



Small marking

Canova, enabling high-definition markings even on very small designs, allows goldsmiths to apply the trademark on jewelry. **4.0 Ready**, Canova integrates flawlessly into Industry 4.0 systems, streamlining processes and improving overall efficiency.



Very high marking quality

TWO POWER SOURCES AVAILABLE

Extremely compact, efficient and low maintenance, Canova is a laser with a fiber source, boasting **precision and high beam quality with an M2 of less than 1.5** (30W).

The wide frequency range allows maximum customisation of parameters to ensure **high performance in high-precision applications**, such as those required by the fine jewellery sector.

The optical component joining system, typical of fiber source lasers, allows Canova to operate without requiring any realignment of the integrated components, up to 15,000 hours of operation (considering medium intensity use).



Accessories



Internal/external ring chuck

The Orotig rotary motor, in combination with 4 different types of chuck, makes it easy to mark not only the **inside or outside of rings and bracelets**, but also **irregularly shaped bracelets**.

The **stepper motor** and **graduated scale** allows the software to set the degree of inclination and position itself with ease and precision.



3 in 1 clamp

The practical 3 in 1 clamp is a single accessory that can be used to **clamp the most disparate of workpieces**: from sheets of metal to medals and parts of irregular shape. The 3 in 1 clamp is flexible in terms of both shape and size: it can be used for workpieces measuring up to 130×130 mm.

Accessories



Tilting angled support

Useful for fast marking of rings and bracelets, the angled bracket **is manually tilted with reference to a graduated scale** to ensure repeatability of the marking.



Honeycomb support

The honeycomb support is a useful accessory especially for **cutting**. In addition to protecting the work surface from the action of the laser, the honeycomb support allows for less overheating of the workpiece and for better marking quality.



Chuck for irregular rings

Engineered for engraving rings of irregular shapes and settings of various sizes, this chuck ensures precise markings even on uneven surfaces, delivering high-accuracy results for complex designs.



Chuck for bracelets

Specifically designed for engraving regularly shaped bracelets, this chuck supports diameters up to 80mm, making it ideal for the efficient and precise marking of a wide range of bracelet sizes.



Touch probe

Accessory that enables **rapid and highly precise focusing of the workpiece**. Ideal for marking difficult and reflective objects.

OTHER ACCESSORIES

100 mm focal lens	TBH BF 10 S vacuum system
210 mm focal lens	TBH BF 100 R vacuum system
Magnetic cutting ring	Cyclone and prefilter for TBH BF 100 R vacuum system
All-in-One PC	External control for vacuum system

Technical data

Model	Canova
Type of laser	Diode pumped fibre (Yb) LASER
Power ranges available	30 W, 50 W
Recommended work	Marking, photo engraving, cleaning, cutting
Type of material that can be marked	All metals, ceramics, some plastics
Focal lenses available	100 mm, 160 mm, 210 mm
Marking area	60×60 mm (with 100 mm focal lens) 110×110 mm (with 160 mm focal lens) 145×145 mm (with 210 mm focal lens)
Type of Z axis	With stepper motor that can be controlled by the software and at the pushbutton control panel (SCAPS only)
Stroke of Z axis	263 mm
Max dimensions of workpiece (LxWxH)	326 × 260 × 260 mm (with 100 mm focal lens) 326 × 260 × 181 mm (with 160 mm focal lens) 326 × 260 × 118 mm (with 210 mm focal lens)
Max weight of workpiece	20 kg
Speed	Up to 8000 mm/sec
Frequency	37-600 Khz (30 W) / 40-600 kHz (50 W)
Pulse energy	0.8 mJ 37 kHz (30 W) / 1.25 mJ 40 kHz (50 W)
Pulse duration	200 nS (30 W - 50 W)
M2	<1,5 (30 W) / <1,8 (50 W)
Safety class	Class 1 (hatch closed), Class 3R (hatch open)
Software	MARKo/Samlight or EZ Cad

Cooling system	Forced air
Wave length	1064 nm
Power	115-230 V ±10% 50-60 Hz
Max consumption	300 W
Weight	49 kg



Except for titanium and steel, where cutting is only possible for simple geometries with a maximum thickness of 0.4 mm.

orotig.com